


3 Hook 2 Roller Invincible Cylinder Door Lock



Features

- Designed to meet the requirements of PAS 24 as part of a complaint door system and BS 6375
- Suitable for use with the Invincible and standard euro cylinder with interchangeable lugs on the gearbox
- Available as 35mm Backset with 16mm face bar
- Non-handed lock mechanism with reversible sash bolts to minimise stock requirements
- Snib facility as standard
- Accepts the Balmoral or Windsor Invincible handle
- Bi-directional throw of locking features - enhanced anti-jimmy feature
- Triple high security hooks for anti-separation resistance - 10mm engagement into keeps
- Hook deadlocked in the fully thrown position
- Precision adjustable rollers for enhanced performance and weathersealing
- 6000 Series adjustable steel keeps offering $\pm 2.0\text{mm}$
- Continuous keep available
- Easy-fit packer system for alternative profiles
- Optional shootbolt engagement for additional security
- Single and French door (passive lock unit) applications

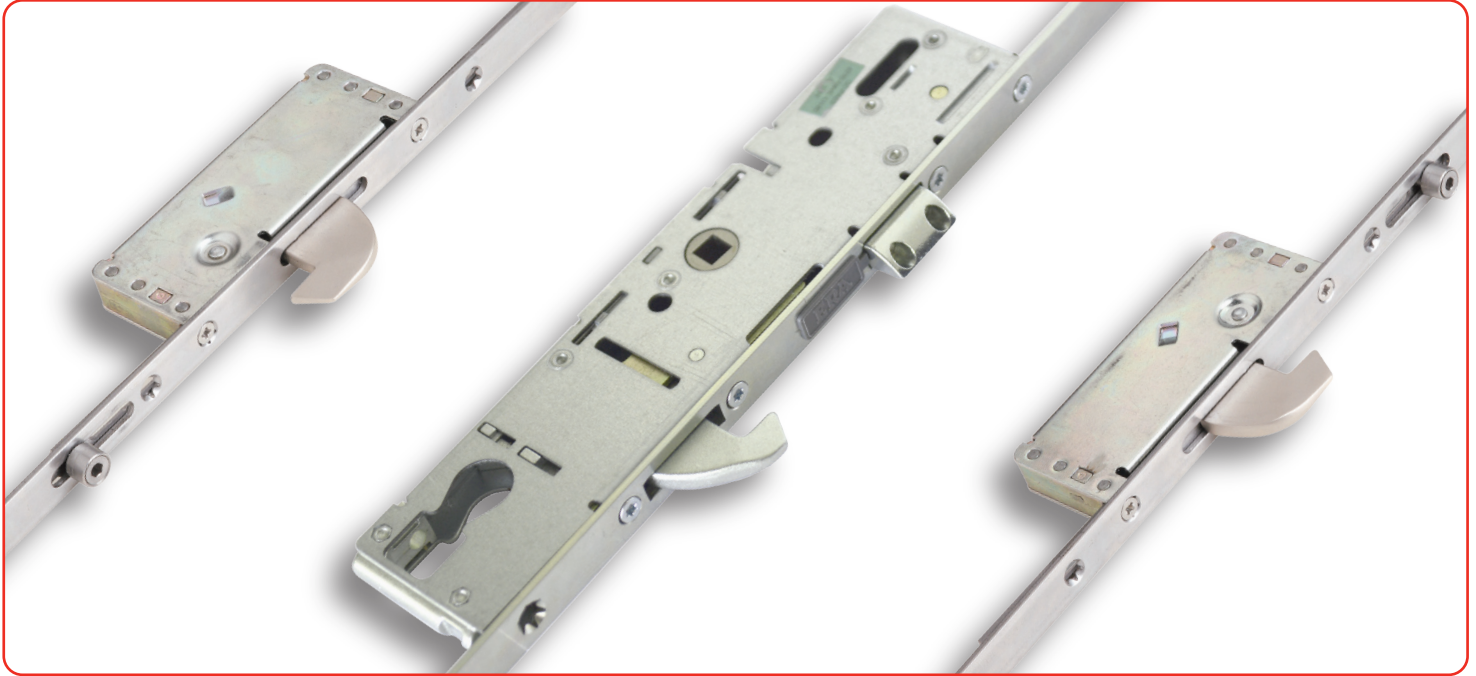

Keeps



Shootbolt (optional)

3 Hook 2 Roller Invincible Cylinder Door Lock

Ordering Details

To select the required 3 hook 2 roller MPL part number, use the tables below to determine:

1. The face bar and backset
2. The overall length of the unit
3. The position of the hooks

KEY

B	Backset
DL	Datum Line
OL	Overall Length
TH	Top Hook
TR	Top Roller
BH	Bottom Hook
BR	Bottom Roller

OPTION 1

B	DL	OL	TH	TR	BH	BR	Part No.
35	1050	2100	610	715	610	715	6635-INV-00-85AA

PASSIVE LOCK FOR DOUBLE DOORS

B	DL	OL	Part No.
35	1050	2120	6535-INV-00-85AA

Technical Information

Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 4 (240 hours)

Operation

Endurance tested in excess of 100,000 cycles

Performance

Tested to meet the requirements of PAS 24 as part of a compliant door set

Material Specification

Lock case:	Steel BZP CR3 Passivate + Seal
Face bar:	Steel BZP CR3 Passivate + Seal
Hooks and Sash bolt:	Steel BZP CR3 Passivate + Seal
Keeps:	Steel BZP CR3 Passivate + Seal

Packaging

Locks:
5 locks per box

Maintenance

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g. "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.

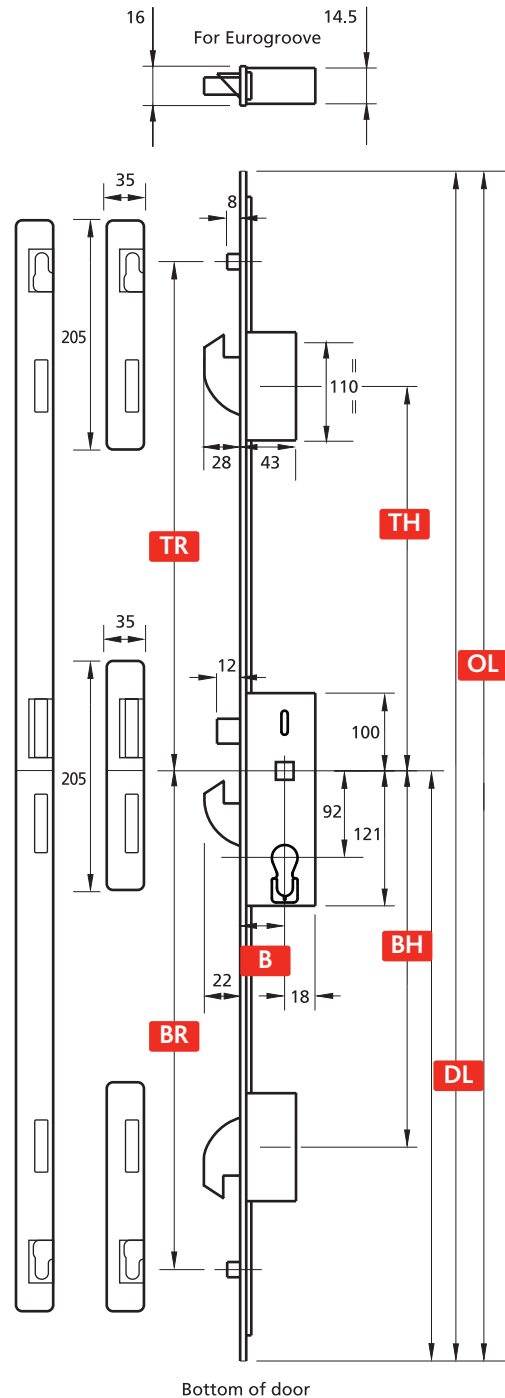


Diagram illustrates product in locked position.

All dimensions are in mm and are nominal.

ERA reserves the right to change specification without notice

It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.