

Balmoral Dummy Lever Lever



Features

- Solid die cast construction with weight balanced spring cassette Sturdy feel and consistent 90 degree lever return
- Flexible purpose component
 Enables all aspects of a job to be completed as a perfectly matching set
- Sculpted ergonomic lever and low friction nylon bush
 Easy to grip and smooth action
- Wide backplate
 To suit accommodate larger cylinder preparation
- Supplied with screw and spindle pack to suit 60-70mm profiles
 Everything needed for installation included
- Baseplate in common with all Balmoral handles
 Same routing detail regardless of product variant chosen
- Colour coordinated screw heads
 Perfectly matching hardware, even down to the smallest details
- Supplied fully assembled
 Simple and quick installation, no need to fit springs or lever
- Supplied with care instructions
 Helps the homeowner to keep the hardware in optimal condition
- Each part packaged in a separate chamber, but supplied as a set No scratching of parts during transit
- Supplied with fixing kit

 Ability to make external lever fixed if required
















EXTERNAL DOORS

Balmoral Dummy Lever Lever

Ordering Details Product **Balmoral Dummy Lever Lever Finish** Part No. 1D501 Hardex Chrome Hardex Bronze 1D503 1D505 Hardex Gold Hardex Graphite 1D508 Antique Black 1D506 1A300 White 1A301 Black 1A302 Silver

Technical Information Corrosion resistance Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours) Endurance tested in excess of 200,000 cycles Performance Tested to meet the requirements of PAS 24 as part of a compliant door set Material Specification Handle Grip and Backplate: High quality Zinc for all Hardex finishes and Antique Black. High quality Aluminium for White, Black and Silver finishes Coatings: Hardex Chrome, Hardex Bronze, Hardex Gold, Hardex Graphite, Antique Black, White, Black and Silver Machine screws with colour Spindle / Screws: coordinated heads for handle. 60mm - 70mm profiles (1 x 8mm x 120mm spindle; 2 x M5 x 70mm and 2x M5 x 80mm screws) Euro Cylinder, 92mm PZ Cylinder:

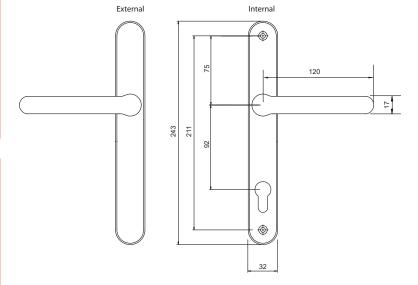

All dimensions are in mm and are nominal. $\label{prop:prop:continuous} Fab\& Fix\ reserves\ the\ right\ to\ change\ specification\ without\ notice$ It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.

Maintenance

For continued protection of the quality finish and appearance, we advise routine cleaning of all our external hardware. We recommend wiping it with a clean cloth soaked in warm water and mild detergent every month. Please refrain from using heavy-duty cleaners, containing Chlorine or Potassium. Moving parts should also be lightly lubricated using a light non-acidic mineral oil (e.g., "3 in 1") at least twice per year. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

Packaging

Handles

Individually bagged with screws, spindle and care instructions. 15 handles in an outer box.