

Windsor Inline Swan Lever Lever



Features

- Solid die cast Zinc construction with heavy duty spring cassette Sturdy feel and consistent 90 degree lever return
- Compact baseplate with screws in close proximity Combats lever attack
- Sculpted ergonomic lever and low friction nylon bush Easy to grip and smooth action
- Supplied with screw and spindle pack to suit 60-70mm profiles
 Everything needed for installation included
- Colour coordinated screw heads
 Perfectly matching hardware, even down to the smallest details
- Baseplate in common with all Windsor handles
 Same routing detail regardless of product variant chosen
- Wide backplate
 To suit cylinder guards and accommodate larger cylinder preparation
- Supplied with care instructions
 Helps the homeowner to keep the hardware in optimal condition
- Supplied fully assembled
 Simple and quick installation, no need to fit springs or lever
- Each part packaged in a separate chamber, but supplied as a set No scratching of parts during transit



Chrome



Hardex



Hardex Gold



VVIIIC



Antique













EXTERNAL DOORS

Windsor Inline Swan Lever Lever

Ordering Details		
Product		
Windsor Inline Swan Lever Lever		
Finish	Part No.	
	Right Handed	Left Handed
Hardex Chrome	1F201	1F251
Hardex Bronze	1F203	1F253
Hardex Gold	1F205	1F255
Antique Black	1F206	1F256
White	1F200	1F250


Technical Information		
Corrosion resistance Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)		
Operation Endurance tested in excess of 20	10,000 cycles	
Performance Tested to meet the requirements	s of PAS 24 as part of a compliant door set	
Material Specification	n	
Handle Grip and Backplate:	High quality Zinc for all finishes	
Coatings:	Hardex Chrome, Hardex Bronze, Hardex Gold, Antique Black and White	
Spindle / Screws:	Machine screws with colour coordinated heads for handle. 60mm - 70mm profiles (1 x 8mm x 120mm spindle; 2 x M5 x 70mm and 2x M5 x 80mm screws)	
Cylinder:	Euro Cylinder, 92mm PZ	

Maintenance


For continued protection of the quality finish and appearance, we advise routine cleaning of all our external hardware. We recommend wiping it with a clean cloth soaked in warm water and mild detergent every month. Please refrain from using heavy-duty cleaners, containing Chlorine or Potassium. Moving parts should also be lightly lubricated using a light non-acidic mineral oil (e.g., "3 in 1") at least twice per year. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

Packaging

Individually bagged with screws, spindle and care instructions. 15 handles in an outer box.

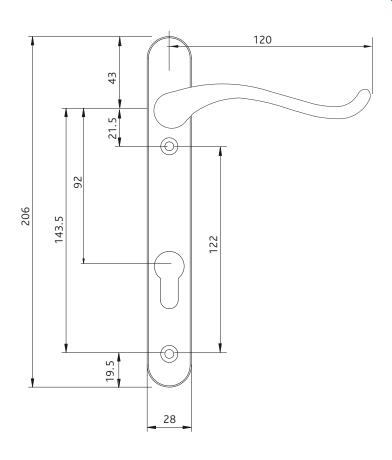

Swan Neck Handling

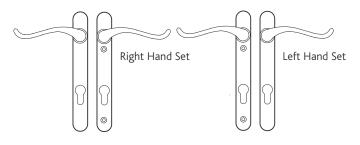

All dimensions are in mm and are nominal. Fab&Fix reserves the right to change specification without notice It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.