

Universal Sprung Inline Lever




Features


- **92mm PZ door handle with long backplate**
Compatible with the majority of UK door locks
- **296mm long backplate**
Perfect repair handle, screws fit above and below most door lock gearboxes
- **Solid die cast zinc construction with heavy duty spring cassette**
Sturdy feel and consistent 90 degree lever return
- **Sculpted ergonomic lever and low friction nylon bush**
Easy to grip and smooth action
- **Supplied with screw and spindle pack to suit 60-70mm profiles**
Everything needed for installation included
- **Colour coordinated screw heads**
Perfectly matching hardware, even down to the smallest details
- **Wide backplate**
To suit cylinder guards and accommodate larger cylinder preparation
- **Supplied with care instructions**
Helps the homeowner to keep the hardware in optimal condition
- **Supplied fully assembled**
Simple and quick installation, no need to fit springs or lever
- **Each part packaged in a separate chamber, but supplied as a set**
No scratching of parts during transit



Hardex
Chrome



Hardex
Bronze



Hardex
Gold



White





Universal Sprung Inline Lever Lever

Ordering Details	
Product	
Universal Sprung Inline Lever Lever	
Finish	Part No.
Hardex Chrome	1P001
Hardex Bronze	1P003
Hardex Gold	1P005
White	1P000

Technical Information	
Corrosion resistance	
Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)	
Operation	
Endurance tested in excess of 200,000 cycles	
Material Specification	
Handle Grip and Backplate:	High quality Zinc for all finishes
Coatings:	Hardex Chrome, Hardex Bronze, Hardex Gold and White
Spindle / Screws:	Machine screws with colour coordinated heads for handle. 60mm-70mm profiles (1 x 8mm x 120mm spindle; 2 x M5 x 70mm screws, 2 x M5 x 80mm screws)
Cylinder:	Euro Cylinder, 92mm PZ

Maintenance	
<p>For continued protection of the quality finish and appearance, we advise routine cleaning of all our external hardware. We recommend wiping it with a clean cloth soaked in warm water and mild detergent every month. Please refrain from using heavy-duty cleaners, containing Chlorine or Potassium. Moving parts should also be lightly lubricated using a light non-acidic mineral oil (e.g., "3 in 1") at least twice per year. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.</p>	

Packaging	
Handles	
Individually bagged with screws, spindle and care instructions.	
15 handles in an outer box.	

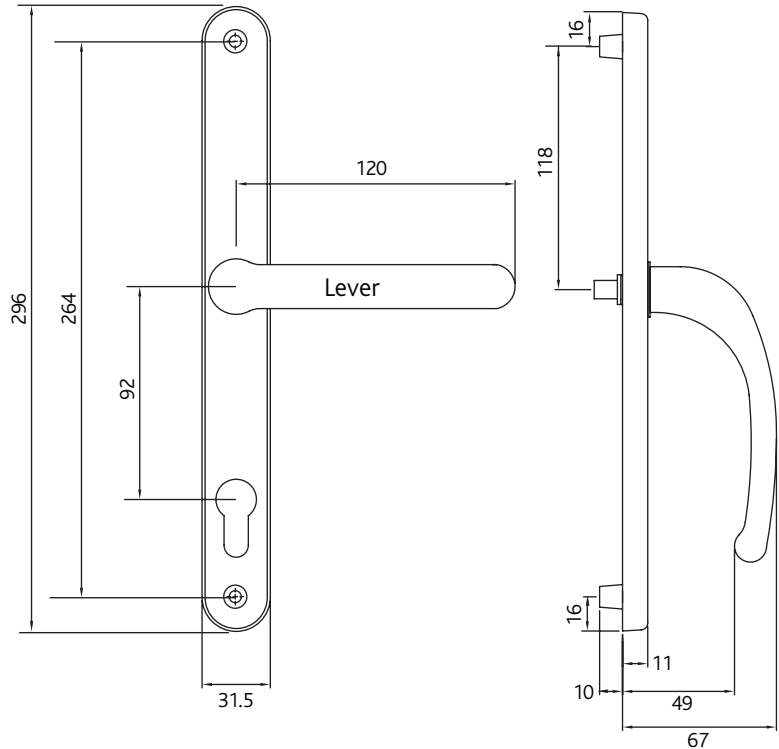

All dimensions are in mm and are nominal.
 Fab&Fix reserves the right to change specification without notice.
 It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.