

Entrilock 3 Hook 4 Roller Door Lock (8000 Series)




Features

- Designed to meet the requirements of PAS 24 as part of a compliant door system, and BS 6375
- Available as 35mm Backset, with 16mm face bar
- Non-handed lock mechanism with reversible sash bolt to minimise stock requirements
- Snib facility as standard on all locks
- Bi-directional throw of locking features - enhanced anti-jimmy feature
- Triple high security hooks for anti-separation resistance - 10mm engagement into keeps
- Hook deadlocked in the fully thrown position
- Four precision adjustable rollers for enhanced performance and weathersealing
- 6000 Series adjustable steel keeps giving $\pm 2.0\text{mm}$
- Continuous keep available
- Easy-fit packer system for alternative profiles
- Accepts standard 92mm unsprung handles and euro profile cylinders (operates with all BS and DIN specification cylinders and most other types of cylinders)
- Optional shootbolt engagement for additional security
- Single door application
- Solid spindle use only



Keeps

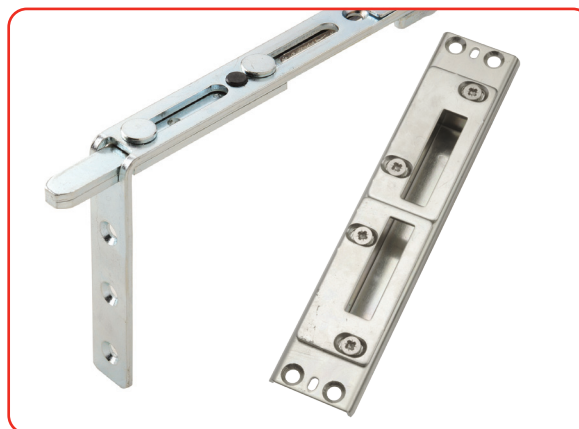

Shootbolt (optional)

Entrilock 3 Hook 4 Roller Door Lock (8000 Series)

Ordering Details

KEY

B	Backset	To select the required 3 hook 4 roller MPL part number, use the tables below to determine: 1. The backset 2. The position of the rollers
DL	Datum Line	
OL	Overall Length	
TH	Top Hook	
TR1	Top Roller	
BH	Bottom Hook	TR2 Top Roller
BR1	Bottom Roller	BR2 Bottom Roller

B	DL	OL	TH	TR1	BH	BR1	TR2	BR2	Part No.
35	1050	2250	610	716	610	715	344	356	8635-4R-00-85AA

OPTIONAL EXTRAS (suitable for option 1 above)

B	Passive Unit	Shootbolts
35	•	•

• Available -
See Passive Unit data sheet for more details

Technical Information

Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 4 (240 hours)

Operation

Endurance tested in excess of 50,000 cycles

Performance

Tested to meet the requirements of PAS 24 as part of a compliant door set

Material Specification

Lock case:	Steel BZP CR3 Passivate + Seal
Face bar:	Steel BZP CR3 Passivate + Seal
Sash bolt:	Steel BZP CR3 Passivate + Seal
Hooks/ Rollers:	Steel BZP CR3 Passivate + Seal
Keeps:	Steel BZP CR3 Passivate + Seal

Packaging

Locks:

5 locks per box

Maintenance

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g. "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.

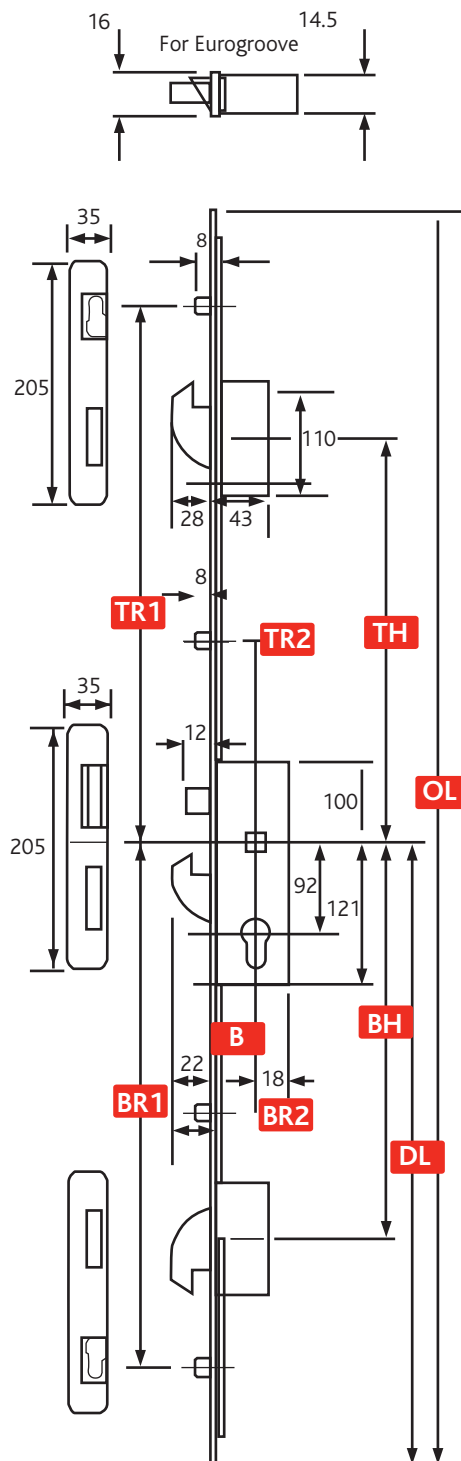


Diagram illustrates product in locked position.

All dimensions are in mm and are nominal.

ERA reserves the right to change specification without notice
It is the responsibility of the door manufacturer to ensure that
the finished product meets any required safety and performance specification.