

ERA

Multi-Point Locks for PVCu, Timber and Composite


FRENCH PATIO
& SLIDING DOORS

Passive Vectis Plus Door Lock



Features

- Vectis Plus encompasses ERA's traditional lever technology used in mortice locks for centuries; combined with today's modern multi-point locking systems
- Patented 5 lever design eliminates the need for euro cylinder operation – so completely free from cylinder manipulation through snapping or bumping
- Available as 35mm Backsets, with 16mm face bar
- 2 Hook, 3 Hook 2 Roller and 3 Hook 4 Roller kit variants complete with primary and passive lock and brass keys
- Suites with the Vectis door handle range
- Shootbolt engagement for additional security

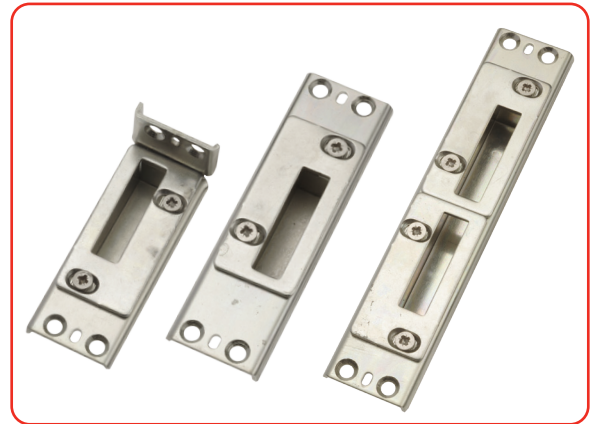

Shoot Keeps



Shootbolt

10
YEAR
Mechanical
Guarantee

ERA
Total Security
Guarantee

VECTIS
PLUS+

p t c
PVCu Timber Composite

Passive Vectis Plus Door Lock

Ordering Details

To select the required passive MPL part number, use the tables below to determine:

1. The backset
2. The overall length of the unit

KEY

B	Backset
DL	Datum Line
OL	Overall Length - Including shootbolts Maximum length illustrated. Bars can be shortened by maximum 30mm top and bottom

2 Hook Kit

B	DL	OL	Part No.
35	1050	2100	93S35-409410-85ZVKIT

3 Hook 2 Roller Kit

B	DL	OL	Part No.
35	1050	2100	96S35-00-85AVKIT

3 Hook 4 Roller Kit

B	DL	OL	Part No.
35	1050	2100	96S35-4R-00-85AVKIT

Shootbolt (sold separately)

Description	Part No.
High Security Shoot Bolt	5650-85
High Security Shoot Bolt - 20mm	5650-20-85
High Security Shoot Bolt - SS 430	5670-79
High Security Shoot Bolt - Low Threshold	5654-85
High Security Shoot Bolt - With Roller	5651-20-85

To be used in conjunction with primary leaf for French doors

Extension Piece (sold separately)

Description	Part No.
525mm Extension Piece	5660-85

Technical Information

Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 4 (240 hours)

Material Specification

Lock case:	Steel BZP CR3 Passivate + Seal
Face bar:	Steel BZP CR3 Passivate + Seal
Shoots/Ext. Piece:	Steel BZP CR3 Passivate + Seal
Keeps:	Steel BZP CR3 Passivate + Seal

Maintenance

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g. "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.

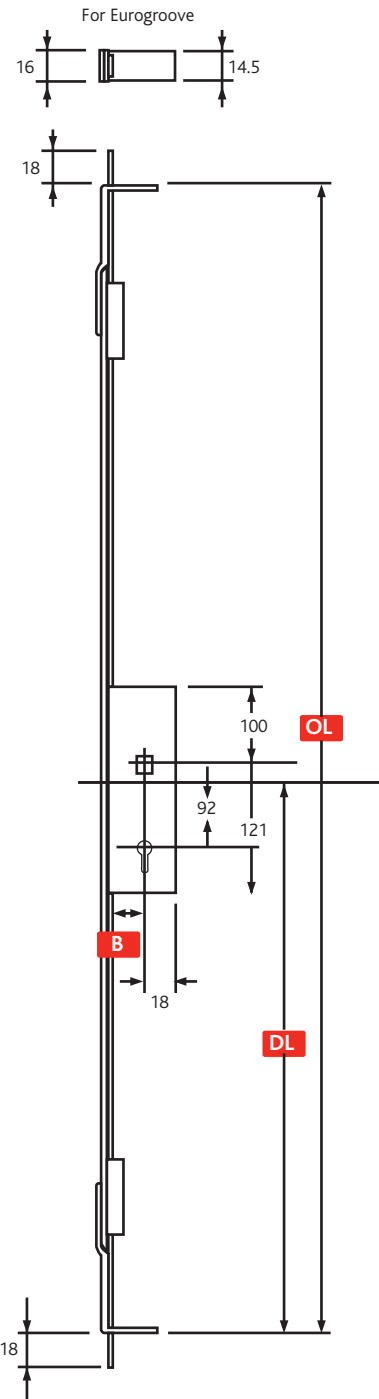


Diagram illustrates product in locked position.

All dimensions are in mm and are nominal.

ERA reserves the right to change specification without notice

It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.

Packaging

Locks:

2 locks per box - includes primary and passive kit