

# Nu Mail Letterplate



# **Features**

- Midrail and panel letterplate options to suit doors 20mm-80mm thick
   Suits a range of door thickness
- Fully colour matched metal letterplate

  Quality and durability you can see and feel
- Anti-snap flap opens to 180° with fully sprung return
   Easier to operate, no broken flaps, even with Sunday papers
- 12" letterplate with a 10" aperture
   Meets Royal Mail standards, will easily take A4 size post
- Secure through fixing ensures letterplate can only be removed from the inside of the house

Prevents burglars gaining access to the cylinder internally

- Can be through fixed or face fixed
   Flexible according to fabricator preference
- Outstanding acoustic insulation\*
   Perfect for flats, or houses near busy roads
- Supplied with screw fixings Everything needed for installation included



Silver



Premium Satin



Matte Black



Black



Grey



Bronze



Hardex Graphite



Antique Black



White

Hardex

Chrome

Hardex Rose



Hardex Pewter













# Nu Mail Letterplate

### **Ordering Details** Product Nu Mail Letterplate Finish Part No. Panel 68 Midrail 68 Panel 76 Midrail 76 (40-80)(20-40)(40-80)(20-40)Hardex Chrome DLPNMHCPA68 DLPNMHCMI68 DLPNMHCPA76 DLPNMHCMI76 Hardex Bronze DLPNMHBPA68 DLPNMHBMI68 DLPNMHBPA76 DLPNMHBMI76 Hardex Gold DLPNMHGPA68 DLPNMHGMI68 DLPNMHGPA76 DLPNMHGMI76 Hardex Graphite DLPNMGRPA68 DLPNMGRMI68 DLPNMGRPA76 DLPNMGRMI76 Hardex Pewter DLPNMPTMI76 Hardex Rose DLPNMHRMI76A Antique Black DLPNMABMI68 DLPNMABPA76 DLPNMABMI76 DLPNMABPA68 Anthracite Grey **DLPNMAGMI68** White DLPNMWHPA68 DLPNMWHMI68 DLPNMWHPA76 DLPNMWHMI76 DLPNMBKPA68 DLPNMBKMI68 DLPNMBKPA76 DLPNMBKMI76 Black DI PNMSIPA76 DI PNMSIMI76 Silver Premium Satin DLPNMPSPA68A DLPNMPSMI68A DLPNMPSPA76A DLPNMPSMI76A Matte Black DLPNMMBMI76A Intumescent Strip **DLPNSIK**

# Technical Information

### Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)

### Operation

Flap cycle tested to 30,000 cycles

Conforms to the requirements of BS EN 13724: 2002

### Performance

Tested as part of a complete door set that successfully achieved PAS 24. Successfully fire tested in accordance with the requirements of BSEN1634-1, suitable for use on 30 minute timber door sets. Intumescent kit available separately (DLPNSIK).

### Screws

Midrail version includes 2 x M5 x 45mm machine screws, 2 x M5 x 63mm machine screw, 2 x M5 x 74mm machine screws and 2 screw guides Panel version includes 2 x M5 x 28mm machine screws and 2 screw guides


Material Specification	
Frame and Flap:	High quality Zinc
Coatings:	Hardex Chrome, Hardex Bronze, Hardex Gold, Hardex Graphite, Hardex Pewter, Hardex Rose, Antique Black, Anthracite Grey, Premium Satin, White, Black and Silver.


### Maintenance

For continued protection of the quality finish and appearance, we advise routine cleaning of all our external hardware. We recommend wiping it with a clean cloth soaked in warm water and mild detergent every month. Please refrain from using heavy-duty cleaners, containing Chlorine or Potassium. Moving parts should also be lightly lubricated using a light non-acidic mineral oil (e.g., "3 in 1") at least twice per year. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

# Overall Frame Size - 310mm Flap Size - 278mm Lug/ Lo mulg/ 19





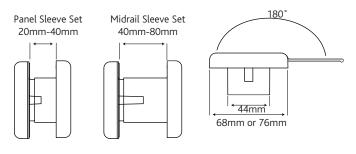



All dimensions are in mm and are nominal.

Fab&Fix reserves the right to change specification without notice
It is the responsibility of the door manufacturer to ensure that the
finished product meets any required safety and performance specification.

## **Packaging**

### Nu Mail Letterplate

Individually boxed with fixings and care instructions. 15 letterplates in an outer box.