

Connoisseur Offset Locking



Features


- **Solid die cast construction**
Heavyweight handle with sturdy feel
- **Heavy duty sprung latching wedge**
Positive click on closing
- **Long handle**
Greater leverage and easy to operate without catching a hand on the window
- **Classic design with a contemporary twist**
Create an elegant and stylish window
- **Patented cover caps with colour coordinated finish**
Perfectly matching components, even down to the smallest details
- **Secured By Design**
Additional peace of mind
- **Key clicks into place when inserted**
Won't fall out of the lock, even when pivoting the lever
- **Slotted spindle (40mm version only)**
Allows cropping to 5mm increments
- **Supplied with screw and spindle pack**
Everything needed for installation included



Hardex Chrome




White



Hardex Gold




Black




Hardex Graphite



Hardex Bronze



Antique Black



Silver



Anthracite Grey



10 YEAR
Mechanical
Guarantee



PVCu



Timber



Secured by Design
SBD
Police Preferred Specification

Connoisseur Offset Locking



| Ordering Details | | | | | | | |
|---|----------|-------|-------|-------|-------|-------|-------|
| Product | | | | | | | |
| Connoisseur Offset Locking - Right Hand | | | | | | | |
| Finish | Part No. | | | | | | |
| Spindle Size | 10mm | 15mm | 20mm | 25mm | 30mm | 35mm | 40mm |
| Hardex Chrome | OD021 | OD041 | OD061 | OD081 | OD101 | OD121 | OD141 |
| Hardex Bronze | OD023 | OD043 | OD063 | OD083 | OD103 | OD123 | OD143 |
| Hardex Gold | OD025 | OD045 | OD065 | OD085 | OD105 | OD125 | OD145 |
| Hardex Graphite | - | OD048 | OD068 | - | OD108 | OD128 | OD148 |
| Antique Black | OD026 | OD046 | OD066 | OD086 | OD106 | OD126 | OD146 |
| White | OB020 | OB040 | OB060 | OB080 | OB100 | OB120 | OB140 |
| Black | OB021 | OB041 | OB061 | OB081 | OB101 | OB121 | OB141 |
| Silver | OB022 | OB042 | OB062 | OB082 | OB102 | OB122 | OB142 |
| Anthracite Grey | - | OB064 | - | OB104 | - | OB144 | |

| Connoisseur Offset Locking - Left Hand | | | | | | | |
|--|----------|-------|-------|-------|-------|-------|-------|
| Finish | Part No. | | | | | | |
| Spindle Size | 10mm | 15mm | 20mm | 25mm | 30mm | 35mm | 40mm |
| Hardex Chrome | OD321 | OD341 | OD361 | OD381 | OD401 | OD421 | OD441 |
| Hardex Bronze | OD323 | OD343 | OD363 | OD383 | OD403 | OD423 | OD443 |
| Hardex Gold | OD325 | OD345 | OD365 | OD385 | OD405 | OD425 | OD445 |
| Hardex Graphite | - | OD348 | OD368 | - | OD408 | OD428 | OD448 |
| Antique Black | OD326 | OD346 | OD366 | OD386 | OD406 | OD426 | OD446 |
| White | OB320 | OB340 | OB360 | OB380 | OB400 | OB420 | OB440 |
| Black | OB321 | OB341 | OB361 | OB381 | OB401 | OB421 | OB441 |
| Silver | OB322 | OB342 | OB362 | OB382 | OB402 | OB422 | OB442 |
| Anthracite Grey | - | OB343 | OB364 | - | OB404 | - | OB444 |

For additional part numbers please contact our sales office.

| Technical Information | |
|-----------------------------|---|
| Corrosion resistance | Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours) |
| Operation | Endurance tested in excess of 25,000 cycles |
| Performance | Tested to meet the requirements of PAS 24 as part of a compliant window |
| Material Specification | |
| Handle Grip and Backplate: | High quality Zinc for all Hardex finishes and Antique Black. High quality Aluminium for White, Black and Silver finishes |
| Coatings: | Hardex Chrome, Hardex Bronze, Hardex Gold, Hardex Graphite, Antique Black, White, Black and Silver |

| Packaging |
|---|
| Handles |
| Individually bagged with screws, key, cover caps and care instructions. 4 handles in an inner box, 40 handles in an outer box. |

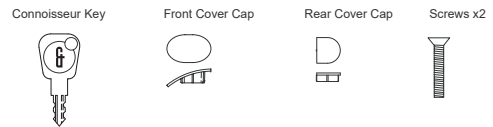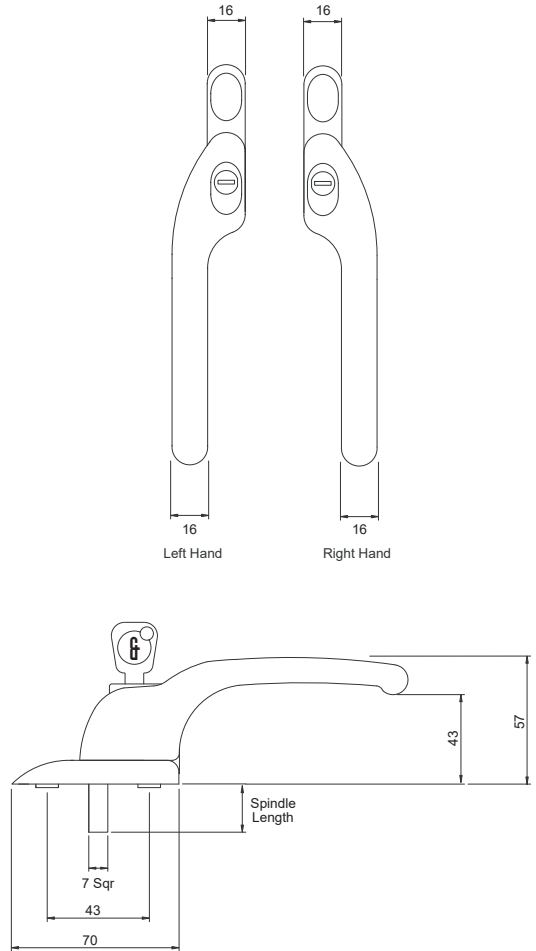

All dimensions are in mm and are nominal.
Fab&Fix reserves the right to change specification without notice
It is the responsibility of the window manufacturer to ensure that the finished product meets any required safety and performance specification.

| Maintenance |
|---|
| For continued protection of the quality finish and appearance, Fab&Fix advise routine cleaning of all our external hardware. Moving parts should also be lightly lubricated at least twice a year. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants. |