

## Connoisseur Offset Non Locking




### Features

- **Solid die cast construction**  
Heavyweight handle with sturdy feel
- **Heavy duty sprung latching wedge**  
Positive click on closing
- **Long handle**  
Greater leverage and easy to operate without catching a hand on the window
- **Classic design with a contemporary twist**  
Create an elegant and stylish window
- **Patented cover caps with colour coordinated finish**  
Perfectly matching components, even down to the smallest details
- **Slotted spindle (40mm version only)**  
Allows cropping to 5mm increments
- **Dedicated non locking handle**  
Conforms to building regulations for non locking windows
- **Supplied with screw and spindle pack**  
Everything needed for installation included



Hardex  
Chrome



Hardex  
Bronze




Hardex  
Gold




White



Black



Silver



Antique  
Black

# Connoisseur Offset Non Locking



Ordering Details				
Product				
<b>Connoisseur Offset Non Locking</b>				
Finish	Part No. Right Hand		Part No. Left Hand	
<b>Spindle Size</b>	<b>30mm</b>	<b>40mm</b>	<b>30mm</b>	<b>40mm</b>
Hardex Chrome	OD661	OD681	OD811	OD831
Hardex Bronze	OD663	OD683	OD813	OD833
Hardex Gold	OD665	OD685	OD815	OD835
Antique Black	OD666	OD686	OD816	OD836
White	OB660	OB680	OB810	OB830
Black	OB661	OB681	OB811	OB831
Silver	OB662	OB682	OB812	OB832

For additional part numbers please contact our sales office.

Technical Information	
<b>Corrosion resistance</b>	Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)
<b>Operation</b>	Endurance tested in excess of 25,000 cycles
<b>Performance</b>	Tested to meet the requirements of PAS 24 as part of a compliant window
Material Specification	
Handle Grip and Backplate:	High quality Zinc for all Hardex finishes and Antique Black. High quality Aluminium for White, Black and Silver finishes
Coatings:	Hardex Chrome, Bronze, Gold, Antique Black, White, Black and Silver

Maintenance
For continued protection of the quality finish and appearance, we advise routine cleaning of all our external hardware. We recommend wiping it with a clean cloth soaked in warm water and mild detergent every month. Please refrain from using heavy-duty cleaners, containing Chlorine or Potassium. Moving parts should also be lightly lubricated using a light non-acidic mineral oil (e.g., "3 in 1") at least twice per year. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

Packaging
<b>Handles</b> Individually bagged with screws, cover caps and care instructions. 10 handles in an inner box, 40 handles in an outer box.

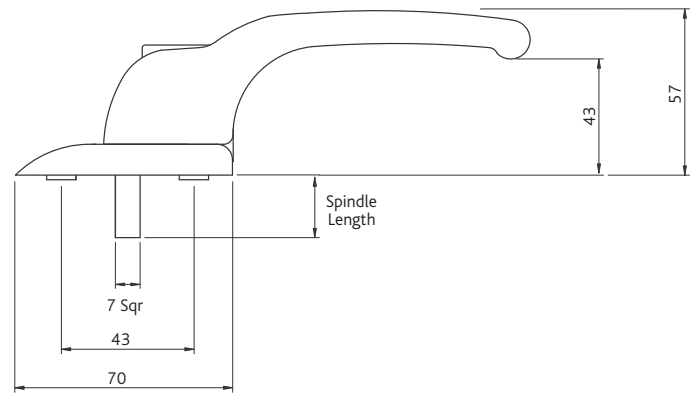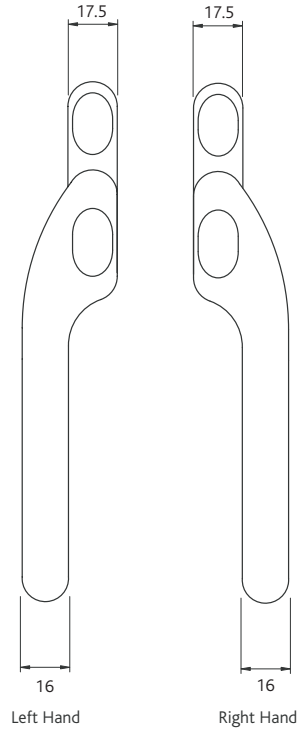

All dimensions are in mm and are nominal.  
Fab&Fix reserves the right to change specification without notice.  
It is the responsibility of the window manufacturer to ensure that the finished product meets any required safety and performance specification.