



Deadlock Shootbolt

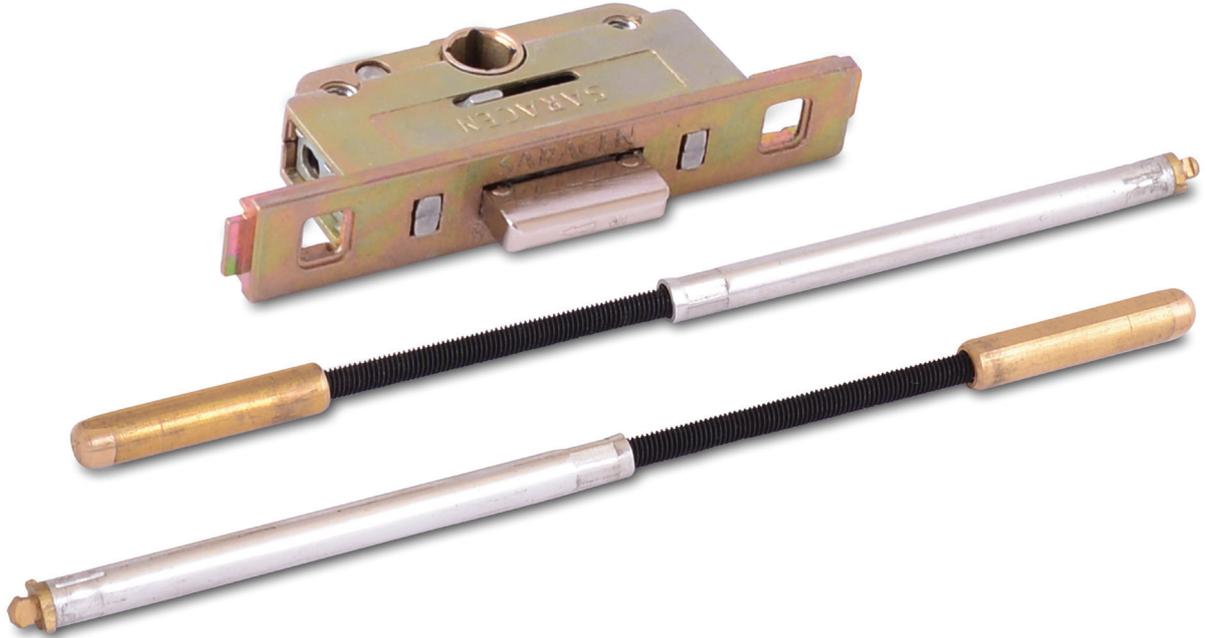

Features

- Ideal solution for eurogroove applications and offers a cost effective solution for window security
- May be fitted internally or can be assembled prior to dropping into a eurogroove
- Ideal for most casement windows
- The full system consists of shootbolts and a unique central gearbox with a deadlock
- All components are profile related and are manufactured from composite or die cast zinc alloy
- Shootbolt rods are available in four lengths and are simple to connect to the gearbox with an easy to adjust screw thread to suit any tolerance variation

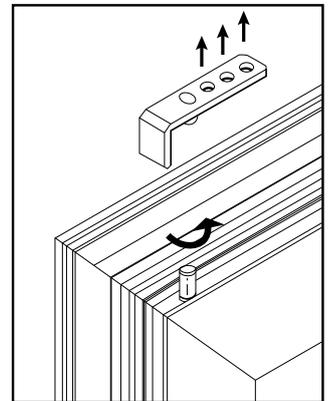

Final adjustment after window is installed

Remove end guide and adjust rod end by screwing clockwise or anti-clockwise until rod is just touching the outer frame. This ensures maximum security.

Deadlock Shootbolt

Ordering Details

Gearbox - please contact sales as gearboxes are profile dependent

Type	Latch Height	Part No.
1	9.5mm	WLSGZY0314095I
2	9.5mm	WLSGZY0393095J
3	11.5mm	WLSGZY0314115I
4	11.5mm	WLSGZY0315115H
5	11.5mm	WLSGZY0393115J

Rods

Size	Sash Rebate Size	Crimped (free running)
Size 1	299-429mm	WLXRZY3111J
Size 2	429-689mm	WLXRZY3112J
Size 3	689-1049mm	WLXRZY3113J
Size 4	1049-1409mm	WLXRZY3114J

Size	Sash Rebate Size	Snap Fit (bayonet)
Size 1	317-445mm	WLXRZY8381F
Size 2	446-699mm	WLXRZY8382F
Size 3	706-1063mm	WLXRZY8383F
Size 4	968-1514mm	WLXRZY8384F

Kits and Keeps - please contact sales for details

Technical Information

Corrosion resistance

Meets the requirements of BS EN 1670: 2007 Grade 3 (96 hours)

Operation


Tested in excess of 30,000 cycles

Material Specification

Gearbox:	High strength Zinc Alloy
Bars:	Aluminium tube, plated mild steel bar with high tensile Brass bolt end
Keeps:	Composite (part) or die cast Zinc Alloy

Maintenance

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.

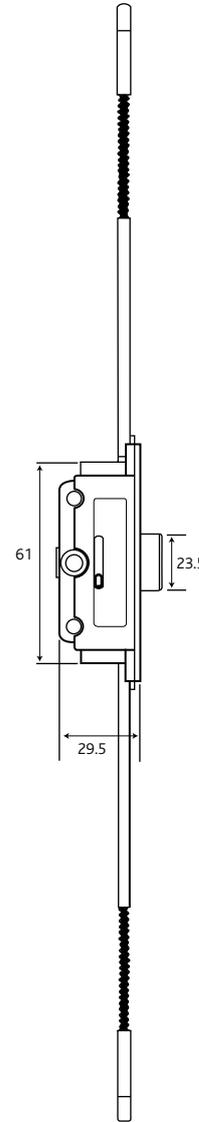

All dimensions are in mm.

ERA reserves the right to change specification without notice. It is the responsibility of the window manufacturer to ensure that the finished product meets any required safety and performance specification.

Packaging

Gearboxes

25 locks per box

Rods

25 pairs per box

Keeps and End Guides

25 centre keeps per box. 25 pairs end keeps and end guides per box

Kits

50 kits per box