

### Maxim Inline Window Handle



### Features

- Modern stylish espagnolette handle
- Firm ergonomic design grip
- Distinctive 'teardrop' feature and recessed button
- Large button for ease of operation
- Positive stop (offset)
- Locks automatically on closing - deadlocked for enhanced security
- Locking and non-locking versions (optional green button)
- Optional inserts to convert locking handles to non-locking
- Offset and inline options
- Various spindle sizes
- Available in White, Polished Gold, Polished Chrome and Satin Chrome finishes
- Clam packed versions available

## Maxim Inline Window Handle

### Ordering Details

Maxim Inline	Part No.	
Finish	Locking	Non Locking
Black	WHM3BKXXILBB	WHM3BKXXINBB
Polished Gold	WHM3MGXXILBB	WHM3MGXXINBB
Polished Chrome	WHM3CHXXILBB	WHM3CHXXINBB
Satin Chrome	WHM3SPXXILBB	WHM3SPXXINBB
White	WHM3WHXXILBW	WHM3WHXXINBW

For Green egress button options please, contact the sales office for details

### Standard Spindle Options

9mm, 15mm, 20mm, 25mm, 30mm, 40mm  
 NB: Add "XX" spindle length to complete code i.e  
 Maxim white 15mm, Lock: WHM3WH15ILBW

### Clam Packed Handles

Finish	Part No.
Polished Gold	3222-75-2
Polished Chrome	3222-37-2
White	3222-01-2

Please Note: Clam packed handles are inline locking, 40mm spindle

### Accessories

Keys	Screw Covers (Self Adhesive)	Screw Covers (Self Adhesive)
WAKEZP13677	Gold: WACCPG6030 Silver: WACCSA6030	White: WACCWH6021 Black: WACCB6021

### Technical Information

#### Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 3 (96 hours)

#### Performance


Endurance tested in excess of 50,000 cycles

### Material Specification

Handle Grip & Back Plate:	Zinc Alloy Castings to BS EN 12844:1999 Aluminium Alloy to BS EN 1676:1997
Coatings:	White and Black Powder Paint Polished Gold, Chrome and Satin Chrome Plate, electroplated to BS EN 12540:2000
Cylinder:	Zinc Alloy Casting and Nickel Plate
Button:	Acetal (POM) Black
Screw Cover:	Push to fit Black or White elastomer Self adhesive Gold or Silver anodised aluminium

### Packaging

Individually packaged with keys (where appropriate), screws and screw cover caps. 1 per bag, 25 handles per box.

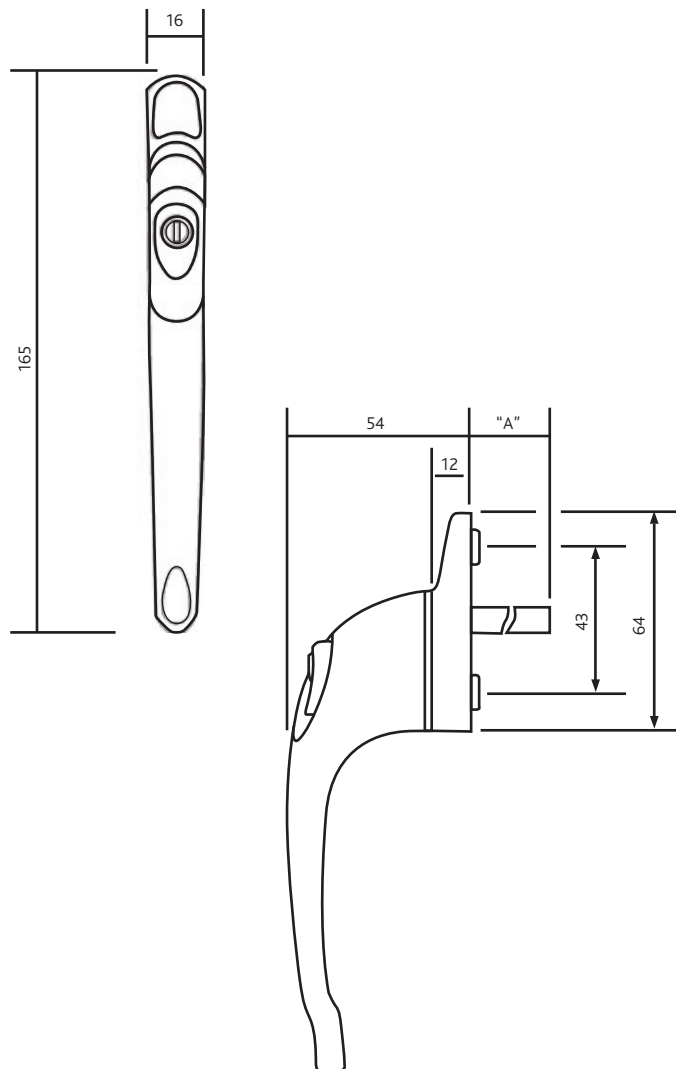

All dimensions are in mm.

ERA reserves the right to change specification without notice.  
 It is the responsibility of the window manufacturer to ensure that the finished product meets any required safety and performance specification

### Maintenance

For continued protection of the quality finish and appearance, we advise routine cleaning of all our external hardware. We recommend wiping it with a clean cloth soaked in warm water and mild detergent every month. Please refrain from using heavy-duty cleaners, containing Chlorine or Potassium. Moving parts should also be lightly lubricated using a light non-acidic mineral oil (e.g., "3 in 1") at least twice per year. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.