


Tubular Latches

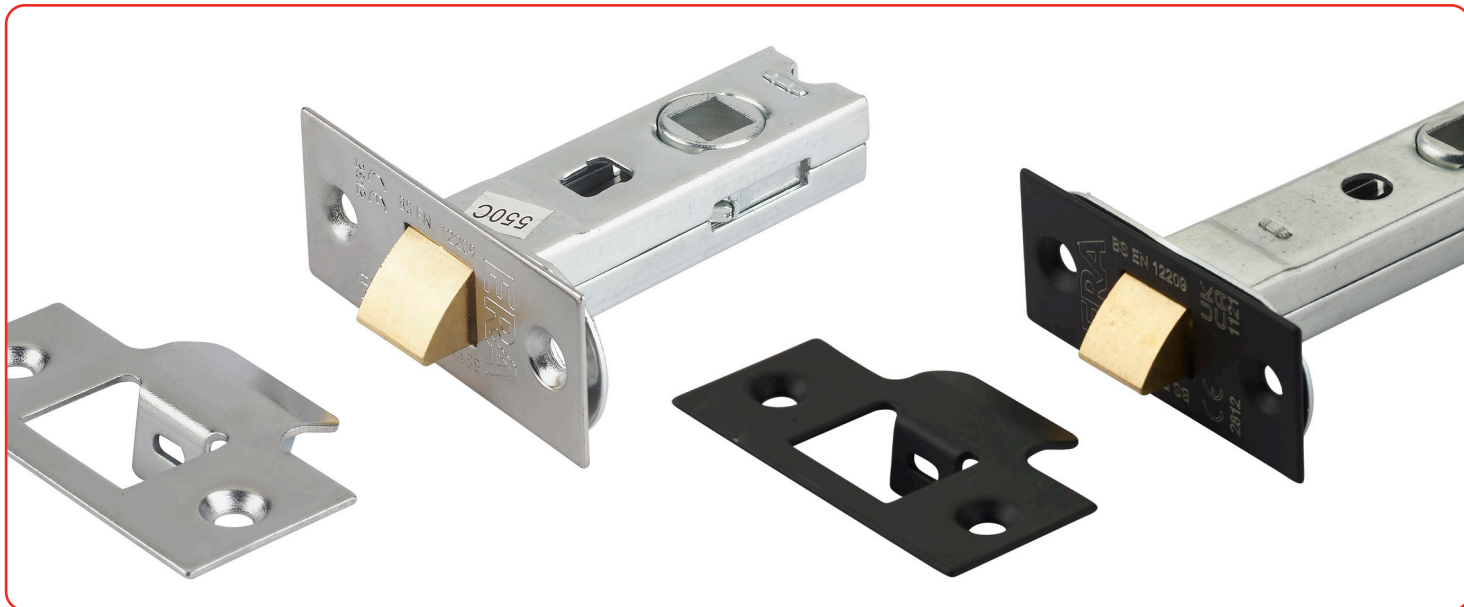

Features


Tubular Latch

- Simple latch device for all internal residential doors
- Can be used with sprung lever handles or knob sets
- Suitable for doors 35mm-54mm thick

UKCA CE Tubular Latch

- Suitable for use on fire or smoke resisting doorsets
- Simple latch device for all internal doors
- Can be used with sprung lever handles or knob sets
- Suitable for doors 35mm-54mm thick
- Suitable for use on 30 and 60 minute fire resisting timber doorsets when fitted with the compatible intumescent strip:
 - 1mm for 30 minute fire doors
 - 2mm for 60 minute fire doors

Tubular Latch



UKCA CE Tubular Latch



Tubular Latches

Ordering Details

Product Part No.

Tubular Latch

Brass 64mm (2.1/2")	188-32
Satin 64mm (2.1/2")	188-92
Brass 76mm (3")	189-32
Satin 76mm (3")	189-92

UKCA CE Tubular Latch

Brass 64mm (2.1/2")	1880-35A
Satin 64mm (2.1/2")	1880-95A
Matte Black 64mm (2.1/2")	1880-MB-1
Brass 76mm (3")	1894-35A
Satin 76mm (3")	1894-95A
Matte Black 76mm (3")	1894-MB-1

Intumescent Kits

1mm (30 minute)	DANTL1IK
2mm (60 minute)	DANTL2IK

Suitable for use with the ERA UKCA CE Tubular Latch on a timber doorset. Additional packaging options may be available, please contact the sales department for more information.

Classification - UKCA CE Tubular Latch

The ERA UKCA CE Tubular Latch has been certified to BS EN 12209:2003 to the following classification:

Category	1	2	3	4	5	6	7	8	9	10	11
Classification	NPD	A	7	1	0	NPD	NPD	NPD	NPD	NPD	0

Packaging

Tubular Latch


Printed retail bagged packaging with euro hooks. 1 lock per retail bag, 10 locks per outer box. 0.11Kg per item, 1.1Kg per outer box

UKCA CE Tubular Latch


Printed retail bagged packaging with euro hooks. 1 lock per retail bag, 10 retail boxes per outer box. 0.11Kg per item, 1.1Kg per outer box

Maintenance

The pivot point should be lightly lubricated twice a year and the surface cleaned with a soft cloth to remove any dust or grime. The product should be periodically adjusted and the fixings tightened to ensure a satisfactory operation

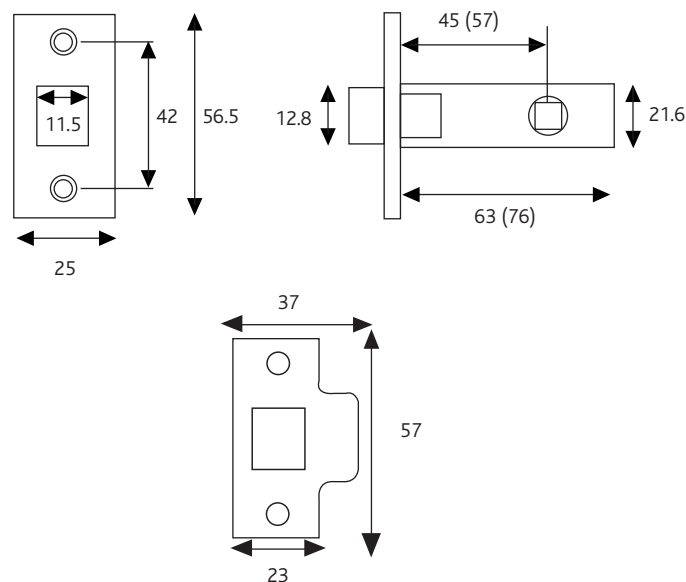

Intumescent Kit

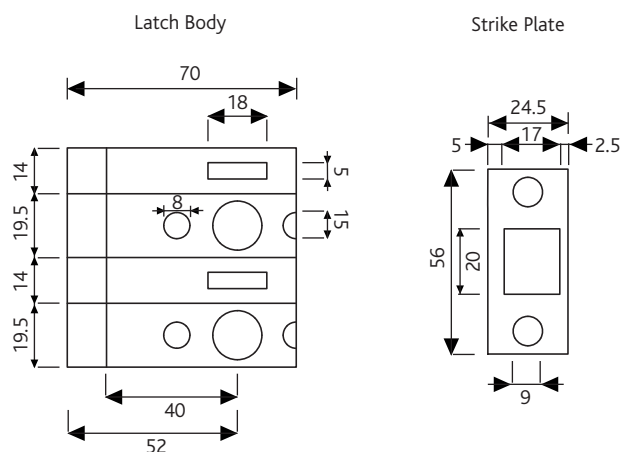

All dimensions are in mm. Brackets are 3" version.
ERA reserves the right to change specification without notice.
It is the responsibility of the window manufacturer to ensure that the finished product meets any required safety and performance specification