


### Bull Ring Knocker



### Features

- **Patented face fixing plate works with all major door materials**  
Easy installation; no need to use fixing bolts or to drill through the door
- **Heritage design**  
Create an elegant finish to a heritage style door
- **Suitable for Timber, Composite and PVCu doors**  
Fully suites to our Perfectly Matching range of hardware

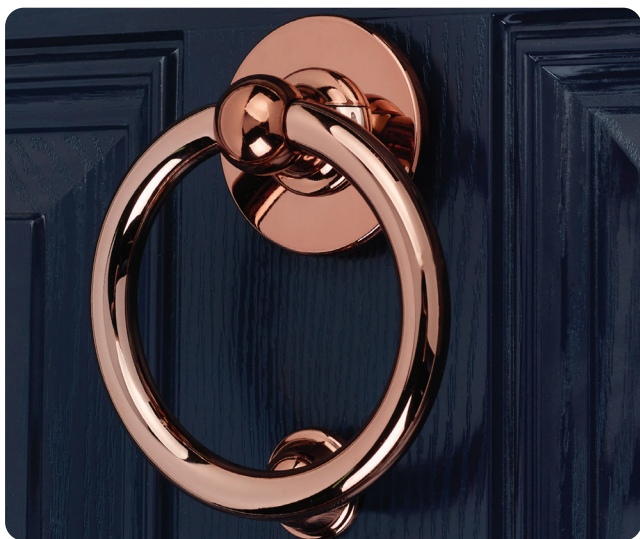


Hardex  
Chrome




Hardex  
Pewter



Hardex  
Bronze




Hardex  
Gold



Hardex  
Graphite



Hardex  
Rose



Antique  
Black



Forged  
Black



Black

## Bull Ring Knocker

### Ordering Details

#### Product

#### Bull Ring Knocker

Finish	Part No.
Hardex Chrome	4A600
Hardex Gold	4A602
Hardex Bronze	4A601
Hardex Graphite	4A604
Hardex Pewter	4A606
Hardex Rose	DFNKNBRHR
Antique Black	4A603
Forged Black	4A607
Black	4A605

#### Fixings (8mm threaded bar and fixing bolt)

Finish	Part No.
Chrome	9F200
Antique Black	9F203
Graphite	9F204
Black	9F205

### Technical Information

#### Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)

#### Material Specification

Knocker:	High quality Zinc
Coatings:	Hardex Chrome, Hardex Gold, Hardex Bronze, Hardex Graphite, Hardex Pewter, Hardex Rose, Antique Black, Black and Forged Black.


### Maintenance

For continued protection of the quality finish and appearance, we advise routine cleaning of all our external hardware. We recommend wiping it with a clean cloth soaked in warm water and mild detergent every month. Please refrain from using heavy-duty cleaners, containing Chlorine or Potassium. Moving parts should also be lightly lubricated using a light non-acidic mineral oil (e.g., "3 in 1") at least twice per year. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.


### Packaging

#### Bull Ring Knocker

Individually boxed with fixing bracket and care instructions.  
20 knockers in an outer box.

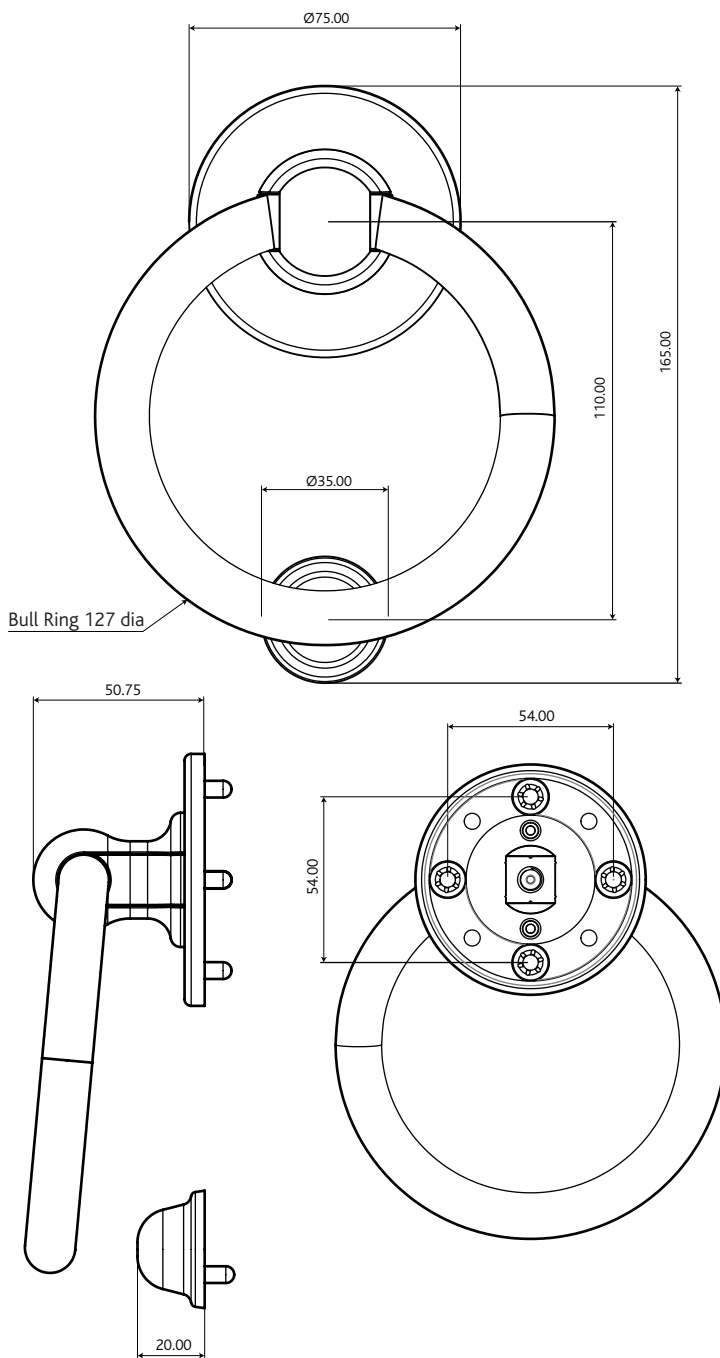

#### Fixings (8mm threaded bar and fixing bolt)

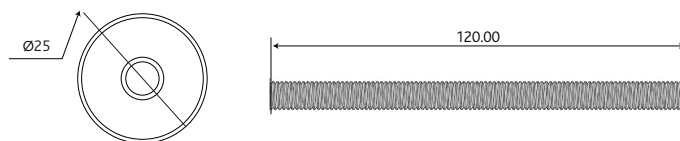

All dimensions are in mm and are nominal.  
Fab&Fix reserves the right to change specification without notice.  
It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.