Fab&Fix Door Handles

EXTERNAL DOORS

# Noble Sprung Inline Lever Lever

## Features

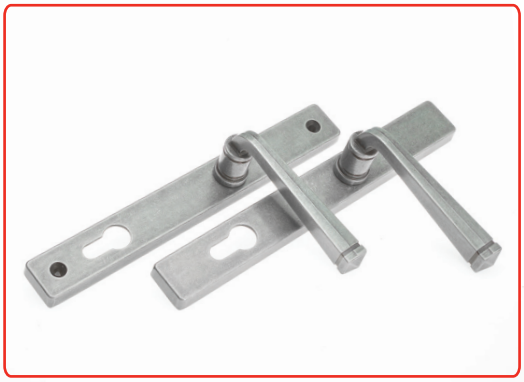

- **Stylish Lever Handle Design**
  Developed to replicate traditional forged hardware in appearance and durability
- **Supplied with screw and spindle pack to suit 44-48mm profiles**
  Everything needed for installation included
- **Colour coordinated screw heads**
  Perfectly matching hardware, even down to the smallest details
- **Solid die cast construction with heavy duty spring cassette**
  Sturdy feel and consistent 90 degree lever return
- **Wide backplate**
  To suit cylinder guards and accommodate larger cylinder preparation
- **Supplied with care instructions**
  Helps the homeowner to keep the hardware in optimal condition
- **Supplied fully assembled**
  Simple and quick installation, no need to fit springs or lever
- **Silicon Site-Protectors available**
  Ensures perfect condition after installation
- **Each part packaged in a separate chamber, but supplied as a set**
  No scratching of parts during transit

Forged Black

Hardex Pewter

10 YEAR Mechanical Guarantee

Timber Composite

ERA Total Security Guarantee

Fab&Fix Door Handles

EXTERNAL DOORS

# Noble Sprung Inline Lever Lever

## Ordering Details

### Product

**Noble Inline Lever Lever**

| Finish | Part No. |
|---|---|
| Forged Black | DHANBFBIL |
| Hardex Pewter | DHANBPTIL |

For additional part numbers please contact our sales office.

## Technical Information

**Corrosion resistance**
Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)

**Operation**
Endurance tested in excess of 200,000 cycles

**Performance**
Tested to meet the requirements of PAS 24 as part of a compliant door set.

## Material Specification

| | |
|---|---|
| Handle Grip and Backplate: | High quality Zinc for all finishes. |
| Coatings: | Forged Black and Hardex Pewter |
| Spindle / Screws: | Machine screws with colour coordinated heads for handle. 44mm - 48mm profiles (1 x 8mm x 110mm spindle; 2 x 60mm M5 screws) |
| Cylinder: | Euro Cylinder, 92mm PZ |

## Maintenance

For continued protection of the quality finish and appearance, we advise routine cleaning of all our external hardware. We recommend wiping it with a clean cloth soaked in warm water and mild detergent every month. Please refrain from using heavy-duty cleaners, containing Chlorine or Potassium. Moving parts should also be lightly lubricated using a light non-acidic mineral oil (e.g., "3 in 1") at least twice per year. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

## Packaging

**Handles**
Individually bagged with screws, spindle and care instructions.
15 handles in an outer box.

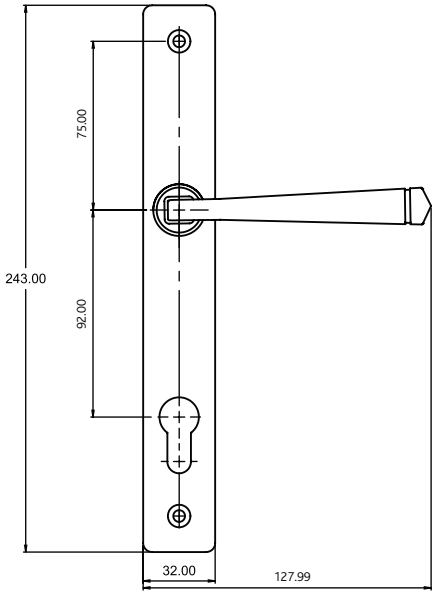


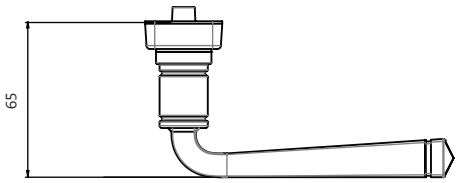


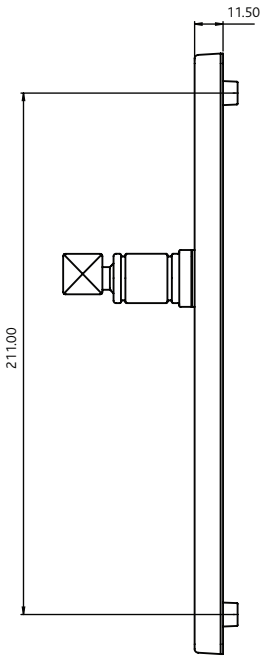


All dimensions are in mm and are nominal.
Fab&Fix reserves the right to change specification without notice
It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.

**ERA** Valiant Way, Wolverhampton, West Midlands WV9 5GB United Kingdom
Tel: +44 1922 490049 Fax: +44 1922 494420 info@erahomesecurity.com
www.eraeverywhere.com

Quanex

Version 4.0 Issue Date: July 2026