


## Twist Lever on Linear Rose



### Features


- **Stylish Twist lever on rose**  
Quick and easy installation task
- **Product dimensions**  
Lever length: 120mm, Projection: 60mm, Rose diameter: 50x11mm
- **Suitable for timber doors, in domestic use only**  
Will meet requirements for many homes
- **Available in three contemporary finishes with matching bathroom escutcheon**  
Brushed Nickel, Polished Nickel and Polished Chrome
- **Supplied as a pair, complete with fixing kit**  
Includes bolt-through and wood screws, Allen key, grub screw and 8mm spindle
- **Sprung handle design – returns to original position when released**  
Ergonomically sound for user
- **50mm screw-on round rose**  
Conceals fixings for modern aesthetic
- **Tested to 100,000 cycles**  
Comes with 10 year mechanical guarantee
- **Low maintenance finish**  
Limited upkeep – low effort but high performing product

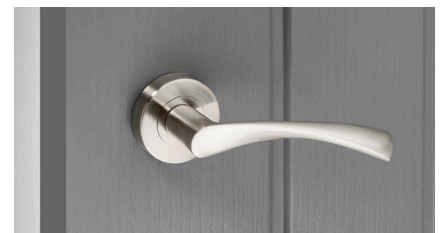

Brushed Nickel



Polished Nickel

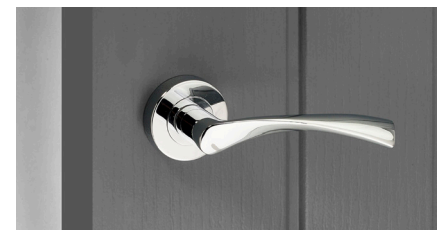

Polished Chrome

## Twist Lever on Linear Rose

### Ordering Details

#### Product

Twist Lever on Linear Rose

Finish	Part No.
Brushed Nickel	DHAINBNTLLR
Polished Nickel	DHAINPNTLLR
Polished Chrome	DHAINPCTLLR

### Technical Information

#### Corrosion resistance

Tested in accordance with BS EN 1670:2007; Grade 2 corrosion – 48 hours corrosion resistance

#### Operation

Endurance tested in excess of 100,000 cycles

#### Performance

Tested in accordance with BS EN 1906:2012; Grade 6

### Material Specification

Lever Handle and Rose:	Aluminium lever for enhanced durability and corrosion resistance High quality zinc rose for additional strength
Finish	Available in three finishes: Brushed Nickel, Polished Nickel, Polished Chrome
Screws:	Supplied with two male/female bolt through fixings suitable for 34-44mm thick doors. Also supplied with eight wood screws



### Maintenance

Wipe the handle periodically with a soft cloth to remove excess grease or moisture.

### Packaging

#### Handles

Individually bagged with screws, bolt thru fixing and fitting instructions. 20 handles in an outer box.

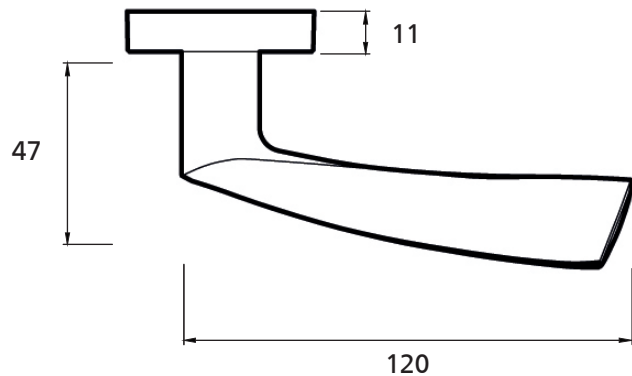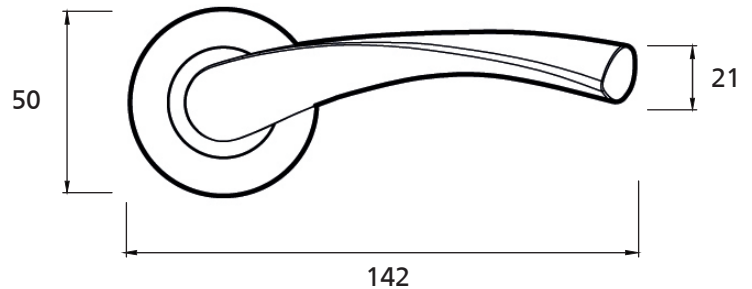

All dimensions are in mm and are nominal.  
ERA reserves the right to change specification without notice.  
It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.