


Balmoral Slimline Inline Lever Lever Handle




Features


- **Low profile solid die cast 4mm height base**
Works perfectly with flush profile systems and sprung door locks
- **Sculpted ergonomic lever and low friction nylon bush**
Easy to grip and smooth action
- **Slim 23mm wide backplate**
To suit flush fitting doors and slim profiles
- **Supplied with screw and spindle pack to suit 70-75mm profiles**
Everything needed for installation included
- **Colour coordinated screw heads**
Perfectly matching hardware, even down to the smallest details
- **Supplied fully assembled**
Simple and quick installation
- **Supplied with care instructions**
Helps the homeowner to keep the hardware in optimal condition
- **Silicon Site-Protectors available**
Ensures perfect condition after installation
- **Each part packaged in a separate chamber, but supplied as a set**
No scratching of parts during transit




Hardex
Chrome




Hardex
Satin




Hardex
Bronze



Hardex
Gold



Hardex
Graphite



Antique
Black



White



Black

Balmoral Slimline Inline Lever Lever Handle

Ordering Details



Product

Balmoral Slimline Inline Lever Lever Handle

Finish

70mm Doors
Inline Lever / Lever

White	1V000
Black	8B125
Hardex Chrome	1V001
Hardex Satin	1V002
Hardex Bronze	1V003
Hardex Gold	1V004
Hardex Graphite	1V006
Antique Black	1V005

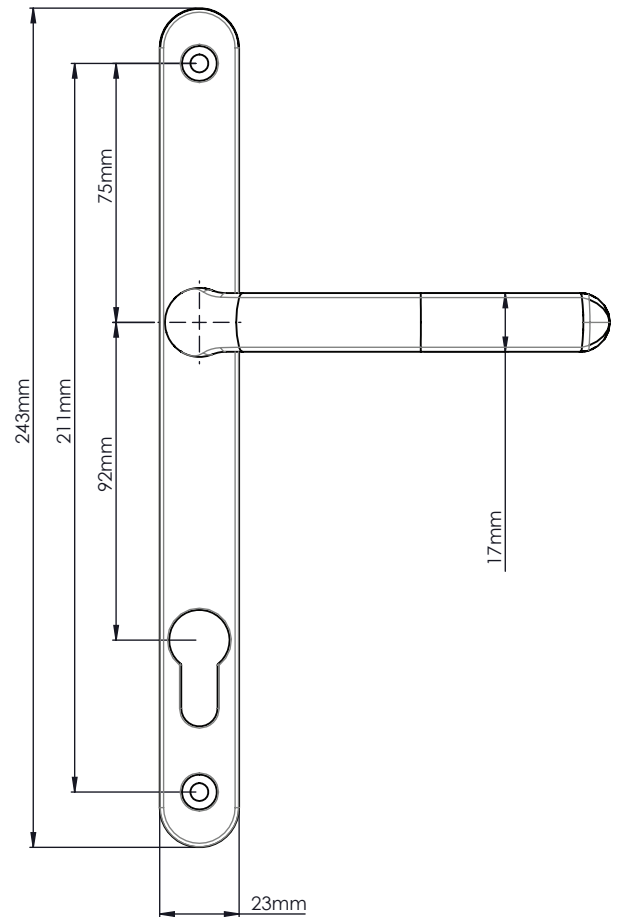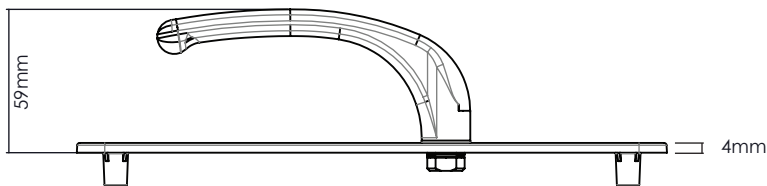

Technical Information

Corrosion resistance

Plated to BS EN 1670 Grade 5

Operation

Function test to 50,000 cycles

Performance

Tested to meet the requirements of PAS 24 as part of a compliant door set

Material Specification

Handle Grip and Backplate:	High quality Zinc
Coatings:	Hardex Chrome, Satin, Bronze, Gold, Graphite, Antique Black, White and Black
Spindle / Screws:	Mild steel, screws with colour coordinated heads for handle. 70mm - 75mm profiles (1 x 8mm x 120mm spindle; and 2 x M5 x 80mm screws)
Cylinder:	Euro Cylinder

All dimensions are in mm and are nominal.
Fab&Fix reserves the right to change specification without notice.
It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.

Packaging

Handles

Individually boxed with screws, spindle and care instructions.
15 handles in an outer box.

Maintenance

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g. "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.