ERA British Standard Mortice Locks
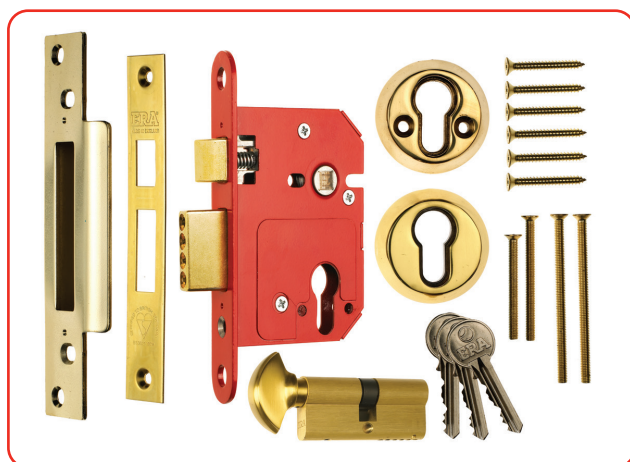
BS Keyless Egress Mortice Lock

BS 8621:2007+A2:2012
KM508652

Egress

Features

- Overcomes the conflict between British Standard accredited front door lock and fire safety recommendations with the new Keyless Egress Range

- The BS 8621:2007+A2:2021 standard mirrors the BS 3621:2007+A2:2012 but is for 'escape' locks

- Provides Keyless Egress at all times, which is applicable when there is a requirement for an easy action method for opening external doors from the inside with no need for keys

- Especially useful for entrance doors in multi-residential buildings

- Hardened steel plates on both to resist drilling

- Four hardened steel plates in both models resists hacksawing

- Sashlock features an easily reversible pull and twist action latch bolt without the removal of the lock cover

- Bolt through heavy-duty security roses protect the cylinder

- 64mm (2½") and 76mm (3") backset options

- Brass Effect, Satin or Chrome Effect finishes available

- CERTIFIRE accredited to ensure compatibility with 30-minute timber based doorsets (BS EN 1634-1 or BS 476: Part 22: 1987), providing a compliant solution to meet the latest legislative standards

Deadlock

Sashlock

---

10 YEAR Guarantee

Timber   Composite

BS 8621:2007+A2:2012
KM508652

Secured by Design
SBD
Police Preferred Specification

CE

UKCA

APPROVED PRODUCT
CF5811

2812 - AG5059 (233/333)
2812 - AG5060 (234/334)

1121 - AG7808 (233/333)
1121 - AG7809 (234/334)

ERA
British Standard Mortice Locks

BS Keyless Egress Mortice Lock

Ordering Details

Euro Thumbturn Deadlock

Finish	Part No. Boxed Version
Brass Effect 64mm (2½")	233-31A
Satin 64mm (2½")	233-51A
Chrome Effect 64mm (2½")	233-61A
Brass Effect 76mm (3")	333-31A
Satin 76mm (3")	333-51A
Chrome Effect 76mm (3")	333-61A

Euro Thumbturn Sashlock

Finish	Part No. Boxed Version
Brass Effect 64mm (2½")	234-31A
Satin 64mm (2½")	234-51A
Chrome Effect 64mm (2½")	234-61A
Brass Effect 76mm (3")	334-31A
Satin 76mm (3")	334-51A
Chrome Effect 76mm (3")	334-61A

35/35 Euro Double Thumbturn Cylinders

Finish	Part No.
Brass (1 Star)	BS-L-T3535-31
Satin (1 Star)	BS-L-T3535-51

Classification - Deadlock

The Fortress Keyless Egress Mortice Lock has been certified to BS 8621: 2007+A2:2012 and BS EN 12209:2003 to the following classification:

Category	1	2	3	4	5	6	7	8	9	10	11
Classification	3	H	8	1	0	F	7	B	A	0	0

Classification - Sashlock

The Fortress Keyless Egress Mortice Lock has been certified to BS 8621: 2007+A2:2012 and BS EN 12209:2003 to the following classification:

Category	1	2	3	4	5	6	7	8	9	10	11
Classification	3	H	8	1	0	F	7	B	A	2	0

Classification - Cylinder

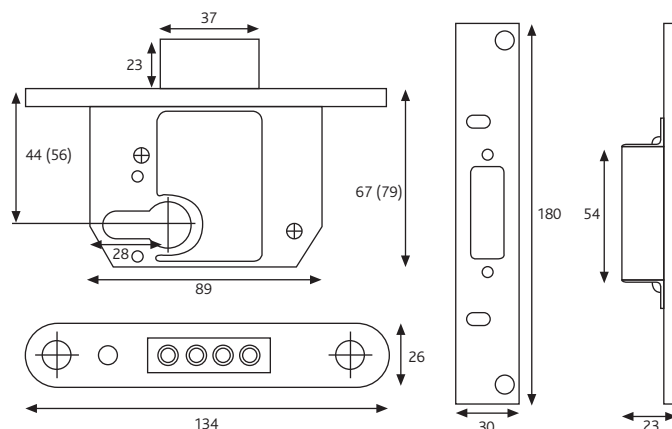The Anti-bump cylinder has been certified to BS EN 1303: 2015 to the following classification:

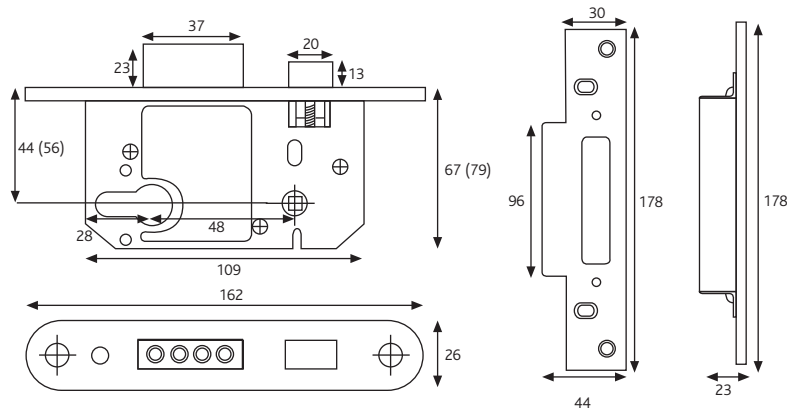| Category	1	2	3	4	5	6	7	8
Classification	1	6	0	1	0	C	6	0

Packaging

Boxed version
1 lock per inner box, 5 locks per outer box. 1.08Kg per item, 5.4Kg per outer box.

Deadlock

Sashlock

All dimensions are in mm and are nominal. Numbers in brackets relate to 3" version of lock. Diagram illustrates product in locked position. ERA reserves the right to change specification without notice It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.

Maintenance

Wipe the surface periodically with a soft cloth to remove excess grease or moisture. All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g. "3 in 1") at least twice per year. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.